PLASTIC LAMINATE AND COUNTERTOPS PL-1: PLASTIC LAMINATE MFR: WILSONART COLOR: LOFT OAK, 7968K-12 FINISH: SOFTGRAIN FINISH **INSTALL:** CABINETS VERTICAL EDGES TO BE PVC EDGEBANDING TO MATCH PLASTIC LAMINATE; BY CHARTER

INDUSTRIES, BASIS OF DESIGN SOLID SURFACE MFR: HI-MACS COLOR: URBAN CONCRETE FINISH: POLISHED

THICKNESS: 1CM RB-1: **WALL BASE**

MOHAWK 4" COVE COLOR: TBD AS SPECIFIED LOCATION: TILE BASE STP **STRIATIONS** COLOR: GRAY FINISH: MATTE 6" X 24"

MAPEI ALABASTER

RESTROOMS

SEE FT-1

GROUT LINES TO ALIGN

MONOLITHIC.WALL AND FLOOR

SIZE: 4'0" X 8'0" SHEETS CLASS: NOTES: PROVIDE WITH BATTEN, PVC TRIMS AND CORNER GUARDS AS REQUIRED. RUN HORIZONTALLY TO BE 48" HIGH ABOVE BASE ON WALLS IN JANITOR & WAITING.

WB-1:

MFR:

MT-1:

MFR:

STYLE:

FINISH:

NOTES:

MCT-1

MFR:

STYLE:

FINISH:

NOTES:

FRP-1:

MFR:

PATTERN

COLOR:

LOCATION:

STYLE:

COLOR:

MATERIAL: ALUMINUM

WINDSWEPT PEWTER

EXTERIOR WINDOWS

STAINLESS STEEL

USE AT TILE BASE

METAL COVE TRIM

STAINLESS STEEL

INSTRUCTIONS.

SMOOTH SURFACE

METAL TRIM

SCHLUTER

RESTROOMS

SCHLUTER

DILEX-AHK

S1005-A

FINEC-SQ

LOCATIONS: ALL EXTERIOR DOORS WITH LITES AND ALL

INSTALL ACCORDING TO MANUFACTURER

FIBERGLASS REINFORCED PLASTIC

MARLITE. BASIS OF DESIGN

1. ALL INTERIOR FINISH SPECIFICATIONS ARE INCLUDED HEREIN OR IN THE ATTACHED SPECIFICATIONS IF APPLICABLE. DISCREPANCIES, OMISSIONS AND DISCONTINUED OR DELAYED MATERIALS ARE TO BE REPORTED WINDOW BLINDS TO THE DESIGN PROFESSIONAL IMMEDIATELY FOR RESOLUTION PRIOR TO PROCEEDING. THE DESIGN SWF CONTRACT PROFESSIONAL IS NOT RESPONSIBLE FOR DISCREPANCIES OR OMISSIONS THAT ARISE DUE TO CHANGES BY CLASSICS 1" CORDLESS MINI BLINDS

WIDTH, U.N.O.: GROUT TO BE SEALED

ANOTHER PARTY AFTER INITIAL DRAWING ISSUANCE DATE UNLESS RECORDED AS A REVISION BY ARCHITECT. 2. SUBSTITUTIONS OF FINISH MATERIALS MUST BE SUBMITTED IN WRITTEN FORM AND ACTUAL SAMPLES PROVIDED. FOR REVIEW BY THE DESIGN PROFESSIONAL AND USER GROUP. CONSTRUCTION PROFESSIONAL MUST RECEIVE

FINISH PLAN GENERAL NOTES

APPROVAL SIGNATURE BEFORE PROCEEDING. REVIEW OF SUBSTITUTIONS DUE TO A CHANGE IN THE ORIGINAL SCHEDULE OR BUDGET MAY BE CONSIDERED ADDITIONAL SERVICES. . INSTALL ALL FINISH MATERIALS ACCORDING TO MANUFACTURER'S INSTRUCTIONS. REMEDIATION OF MOISTURE IN THE CONCRETE, AS IT RELATES TO THE FLOORING MATERIAL AND ITS INSTALLATION MUST BE STRICTLY

ADHERED TO IN ORDER TO AVOID RISK OF VOIDING WARRANTY 4. ONLY ONE DYE-LOT OF EACH STYLE AND COLOR SPECIFIED IN THE FINISH SCHEDULE SHALL BE USED.

5. REMOVE FINISH MATERIALS FROM PACKING AND ALLOW TO ACCLIMATIZE TO AREA OF INSTALLATION ACCORDING TO MANUFACTURER'S SPECIFICATIONS.

6. ALL SURFACES WHICH ARE TO RECEIVE A FINISH APPLICATION SHALL BE COMPLETELY SMOOTH FOR SCHEDULE FINISH MATERIAL. 7. ALL MISCELLANEOUS GRILLES, PLATES, ETC. OCCURRING ON WALLS OR CEILINGS ARE TO BE FINISHED TO

MATCH WALL OR CEILING ON WHICH THEY OCCUR. CONSULT DESIGN PROFESSIONAL ON FINAL FINISH. 8. ALL PAINTED SURFACES ARE TO RECEIVE ONE PRIME COAT AND A MINIMUM OF TWO FINISH COATS. APPLY ADDITIONAL COATS OF PRIME AND FINISH PAINT AS REQUIRED UNTIL EXISTING UNDERCOAT OR OTHER CONDITIONS ARE FULLY CONCEALED AND PAINT FILM IS OF A UNIFORM FINISH, COLOR AND APPEARANCE. REFER TO SPECIFICATION SECTION 099123 INTERIOR PAINTING FOR CLARIFICATION.

9. PAINT FOR DOOR FRAMES AND DOORS WHEN APPLICABLE, WILL BE SHERWIN WILLIAMS PRO-CLASSIC WATERBORNE ACRYLIC SEMI-GLOSS B-31 SERIES, BASIS OF DESIGN. 10. - NOTE REMOVED

11. PRIOR TO FLOORING INSTALLATIONS. PERFORM A CALCIUM CHLORIDE MOISTURE TEST TO ENSURE MOISTURE CONTENT MEETS MANUFACTURER'S ACCEPTABLE LEVELS. CONSTRUCTION PROFESSIONAL TO DOCUMENT AND

12. FLOORING TRANSITIONS WILL OCCUR UNDER CENTERLINE OF DOOR IN CLOSED POSITION., U.N.O. 13. WHERE FLOORING MATERIALS OF DIFFERING THICKNESS MEET, LEVEL AS REQUIRED TO MEET ADA GUIDELINES AND SMOOTH AS REQUIRED. 14. INSTALL CERAMIC, PORCELAIN AND STONE TILES WITH MANUFACTURER'S MINIMUM RECOMMENDED GROUT

15. INSTALL REDUCER STRIPS WHERE FLOORING MATERIALS CHANGE, U.N.O., INSTALL VINYL REDUCER STRIP TO MATCH SCHEDULED BASE.

16. PAINT FIRE EXTINGUISHER CABINETS SEMI-GLOSS TO MATCH WALL ON WHICH IT OCCURS. 17. BASE CABINET PLASTIC LAMINATE TOE KICKS TO MATCH CORRESPONDING BASE CABINET PLASTIC LAMINATE SPECIFICATION, U.N.O. 18. ALL AREAS TO RECEIVE LVP. RUBBER BASE, EGGSHELL WALL PAINT AND SEMI-GLOSS DOOR FRAME, U.N.O.

19. ALL WET WALLS TO RECEIVE PORCELAIN TILES TO HAVE CEMENT BACKER BOARD 20. SUBMIT SAMPLES OF ALL FINISH MATERIALS TO THE DESIGN PROFESSIONAL FOR APPROVAL PRIOR TO ORDERING MATERIALS AND COMMENCING WORK. SUBMIT ACTUAL COLOR AND FINISH OF PAINT ON 8-1/2" X 11" SAMPLES. SAMPLES OF NATURAL STONE OR OTHER MATERIAL WITH WIDE VARIATIONS SHALL COME FROM ACTUAL MATERIAL TO BE USED.

21. PREPARE SURFACES FOR ACCEPTING OF FINISHES PER MANUFACTURER'S RECOMMENDATIONS. 22. WHEN BASE IS CONTINUOUS OR TRANSITIONED ON AN OUTSIDE CORNER WHERE FLOOR MATERIALS OF DIFFERENT THICKNESS OCCUR, SET BASE ON TOP OF LOWER FLOORING MATERIAL AND TRIM THE BOTTOM OF BASE AT THE HIGHER FLOORING SUCH THAT IT IS BOTH TIGHT TO THE FLOORING AND ALIGNS WITH THE BASE AT THE LOWER FLOORING AT THE TOP EDGE. NOTE: WOOD BASE TO BE INSTALLED AFTER FLOORING IS INSTALLED.

23. PROVIDE BLOCKING IN AREAS DESIGNED TO RECEIVE OVERHEAD CABINETS OR WALL PEG BOARD. 24. IF DESIGN PROFESSIONAL'S WRITTEN DESCRIPTION OF COLOR NAME. NUMBER AND MANUFACTURER'S INFORMATION ARE IN CONFLICT, CONTACT DESIGN PROFESSIONAL FOR CLARIFICATION BEFORE ORDERING MATERIALS.

25. ALL CASEWORK TO RECEIVE TOPS FABRICATED IN SOLID SURFACE, U.N.O. REFER TO INTERIOR ELEVATIONS FOR CLARIFICATION.

26. PROVIDE BLOCKING IN AREAS DESIGNATED TO RECEIVE OVERHEADS IN ALL OFFICES. TYPICAL CONDITION TO OCCUR AT WALL PARALLEL TO RETURN

27. COVERPLATES ON DEVICES TO MATCH EXISTING WITH RECEPTACLES TO MATCH EXISTING.

MILLWORK GENERAL NOTES

REFER TO INTERIOR ELEVATIONS, WHICH IDENTIFY THE ROOM AND WALL (NORTH, SOUTH, EAST OR WEST) ON WHICH THE CABINETRY IS LOCATED. COORDINATE ALSO WITH FLOOR PLANS. 2. SPECIALIZED CABINET SECTIONS ONLY ARE KEYED OR NOTED ON

CABINET ELEVATIONS. OTHER CABINET SECTIONS ILLUSTRATE TYPICAL CONSTRUCTION & NOT EVERY DOOR AND/OR DRAWER VARIATION IS

ALL WORKSURFACES & COUNTERTOPS ARE SS-1 U.N.O. 4. PROVIDE FINISHED END PANELS AND/OR END RETURNS AT OPEN ENDED CABINETRY (INCLUDING KNEE SPACES).

PROVIDE PLAM CLAD TRIM AND FILLER PANELS WHERE EQUIPMENT IS LOCATED WITHIN CABINET UNITS. 6. PROVIDE SIDE SPLASHES WHERE COUNTERTOPS ABUT WALLS AT

SIDES - U.N.O. PROVIDE COUNTERTOP BRACE SUPPORTS AT 48" O.C. MAX. @ KNEE SPACES & LAVATORY COUNTERS, U.N.O. 8. PROVIDE BLOCKING WITHIN PARTITION FOR ALL CABINETRY ATTACHED

TO WALLS. SEE DETAILS FOR ATTACHMENT DETAILS. 9. CABINET UNIT DEPTH IS AS SHOWN ON SECTION, U.N.O ON ELEVATION(S).

10. - NOTE REMOVED -11. PROVIDE BOTTOM CLOSURE FOR FILLER PANELS AT TOE SPACES AND AT BOTTOM OF UPPER WALL CABINETS TO CLOSE OFF AND SEAL TIGHT ALL CONCEALED OPENINGS

CABINET HARDWARE:

DOOR HINGES TO BE BLUM 71T5580 CHROMED, CONCEALED, SELF-CLOSING. DRAWER SLIDES TO BE HEAVY DUTY ACCURIDE HAFELE #3634, DRAWER PULLS TO BE MOCKETT DP55A STAINLESS STEEL OR APPROVED **EQUALS**

MILLWORK REVEALS: PITTCON, VENEER CHANNEL, VPR75-38/38

ALL P-LAM CASEWORK TO PER AWI STANDARDS


12. ALL MILLWORK/CASEWORK TO BE PL-1 U.N.O.

INTERIOR ELEVATION NOTES

. GENERAL CONTRACTOR TO COORDINATE EQUIPMENT OUTLINED IN "EQUIPMENT LEGEND" WITH OWNER & OWNER'S MEDICAL EQUIPMENT REPRESENTATIVE. THIS INCLUDES VERTICAL AND HORIZONTAL MOUNTING HEIGHTS OF ALL DEVICES. COORDINATION WITH ARCHITECTURAL, MECHANICAL, ELECTRICAL AND PLUMBING. THE ARCHITECT SHALL RECEIVE SHOP DRAWINGS SHOWING FINALIZED SELECTION OF EQUIPMENT AND SPECIFICA MODEL NUMBERS REVIEWED BY DESIGN TEAM/ENGINEERS PRIOR TO PROCEEDING WITH SCOPE OF WORK.


. ELECTRICAL OUTLETS ARE ONLY SHOWN FOR COORDINATION WITH EQUIPMENT, SEE ELECTRICAL DRAWINGS FOR MORE INFORMATION..


. LOW VOLTAGE BY OWNER'S REPRESENTATIVE. I. FURNITURE SHOWN IS TO BE PROVIDED BY OWNER U.N.O. GENERAL CONTRACTOR TO COORDINATE WITH OWNER ON DELIVERY SCHEDULE.

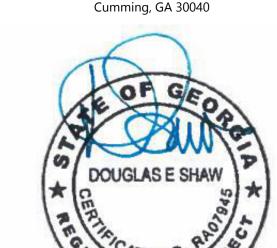


208 Pirkle Ferry Road, Suite C



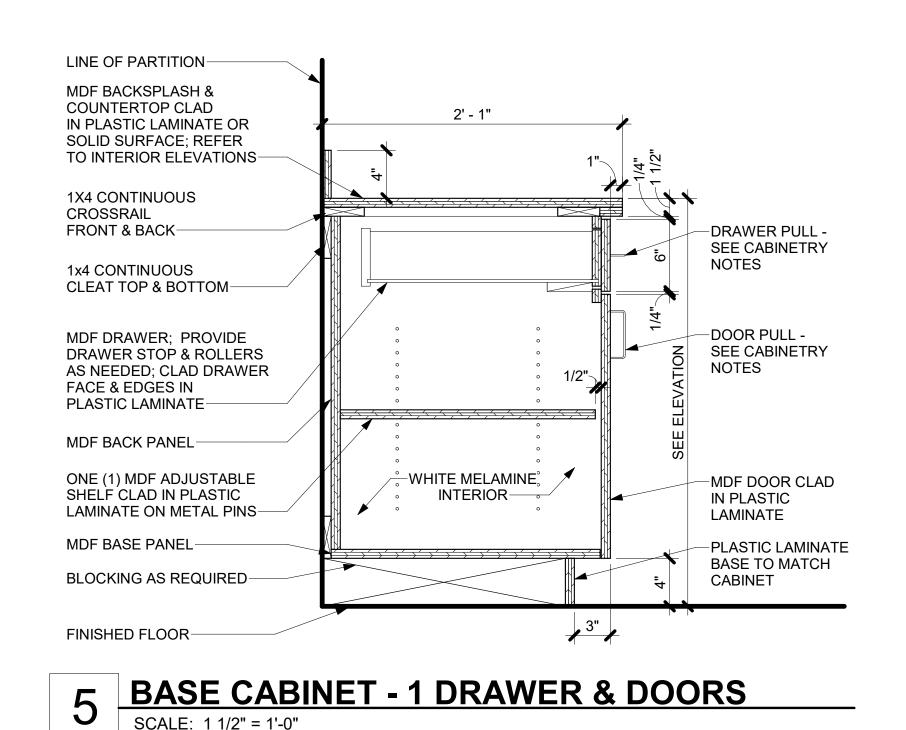


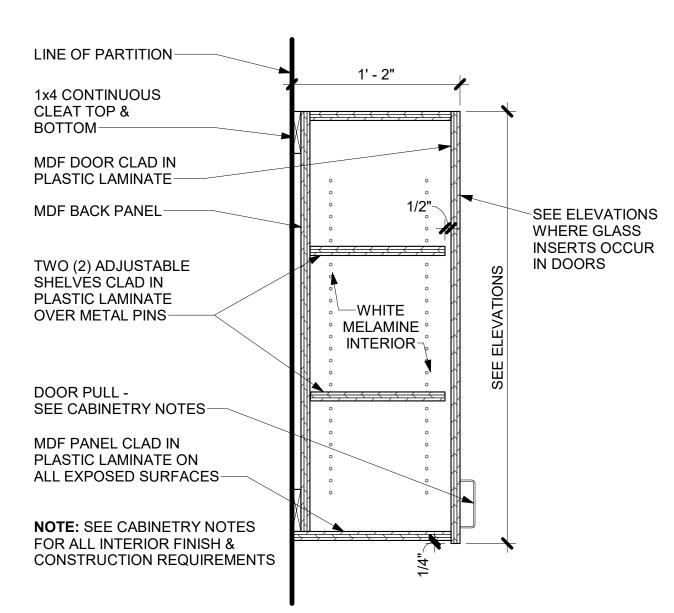




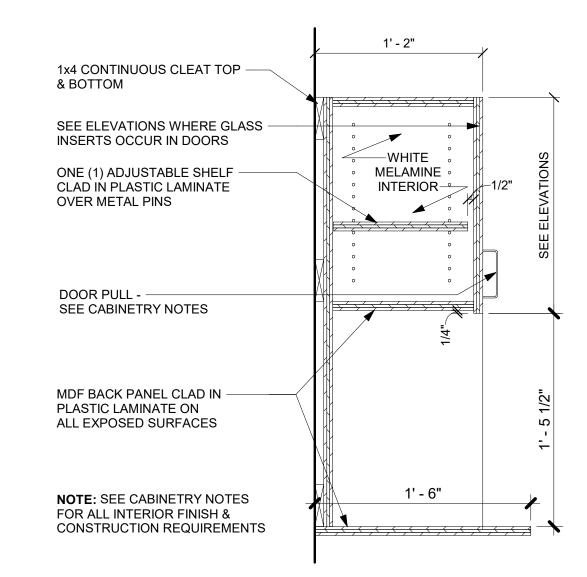


UPPER CABINET - DOOR WITH SHELF

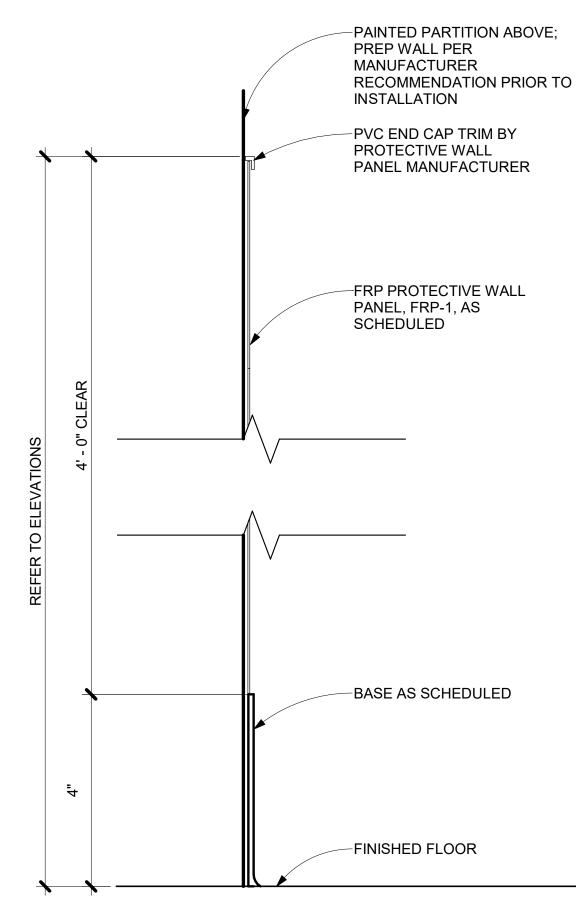


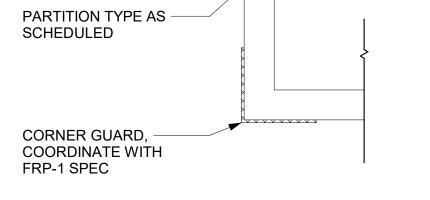

WALL PROTECTION DETAIL

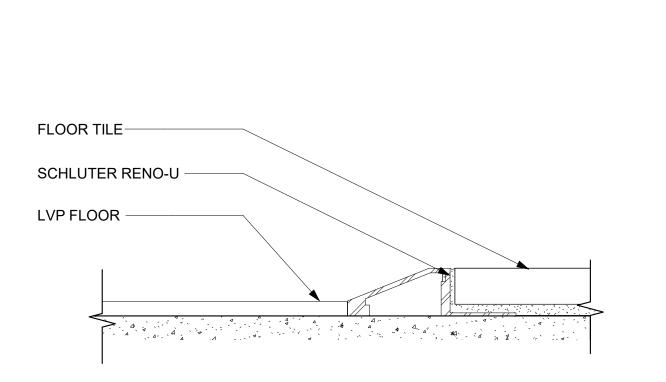

TRANSITION - TILE TO LVP

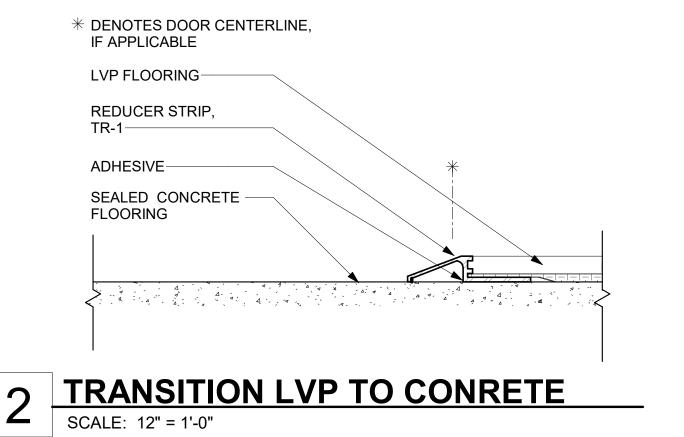

CORNER GUARD DETAIL

Sheet No. ID-1.01

FINISH SCHEDULE &

GENERAL NOTES

PRINT RECORD

09/19/2025 ISSUED FOR BID

A 12/05/2025 ADDENDUM #3

DESCRIPTION

Checked By

Checker

Job No.

No. DATE

Drawn By

Author

Date

08/01/2025

Sheet Title

RELEASED FOR BID